


Konko Velvet

design: 2019, Cezary Zadorożny

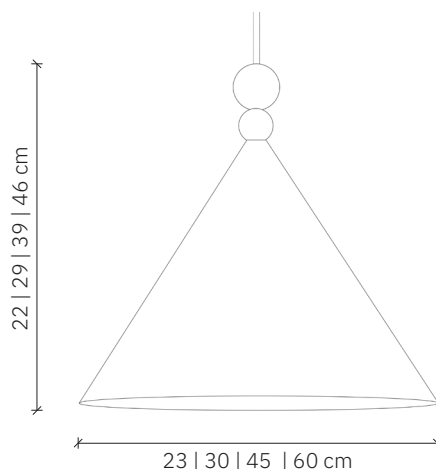

Model	Konko Velvet
Material	Aluminium
Finish	Aluminium covered with velvet structure
Dimensions	Ø 23 cm, H: 22 cm, Ø 30 cm, H: 29 cm Ø 45 cm, H: 39 cm, Ø 60 cm, H: 46 cm
Power cord	Fabric-coated black silicone - 120 cm
Power supply	220-240V
Light Source	E27 max. 60W (not included)
Ceiling rose	Cone aluminium ceiling rose covered with velvet structure, Ø 12 cm
Weight	23: 0,57 kg; 30: 0,74 kg; 45: 1,4 kg; 60: 2,3 kg

User Manual:

- Gently remove the packaging.
- Before starting the installation, check if the product is complete and contains all elements without any damage.
- Check if all cables have undamaged insulation of wires and conductors.
- If any damage occurred during transport, report it to the seller.
- Turn off the power in the room where the lamp will be installed. Switch off the circuit breakers or the main power switch.
- It is recommended that the fixture be installed by an electrician or a properly trained person.
- The manufacturer does not provide wall plugs with the lamp. It is recommended to purchase plugs specifically designed for the mounting surface.
- Use only recommended bulbs to avoid overheating.
- It is recommended to install with gloves.

Maintenance Tips:

- Use a soft, dry, or slightly damp cloth to wipe off dust.
- Do not use any aggressive cleaning agents, as this may cause permanent stains or discoloration of the lamp.
- Keep the user manual.



Konko Velvet

design: 2019, Cezary Zadorożny

Model	Konko Velvet
EAN code Konko 23	5902730888390
EAN code Konko 30	5902730886792
EAN code Konko 45	5902730886808
EAN code Konko 60	5902730888406
Producer	LOFTLIGHT Bottonova Sp. z o. o.
Design	Cezary Zadorożny
Type	Pendant lamp
Materials	Aluminium
Finish	Aluminium covered with velvet structure
Diameter	23 30 45 60 cm
Height	22 29 39 46 cm
Power cord	Fabric-coated black silicone
Standard cord length	120 cm
Power supply	220-240V
Light source	E27 max. 60W (not included)
Ceiling rose	Cone aluminium ceiling rose covered with velvet structure, Ø 12 cm
Number of light points	1
Weight	23: 0,57 kg; 30: 0,74 kg; 45: 1,4 kg; 60: 2,3 kg
IP protection degree	IP20

